Fig. 1

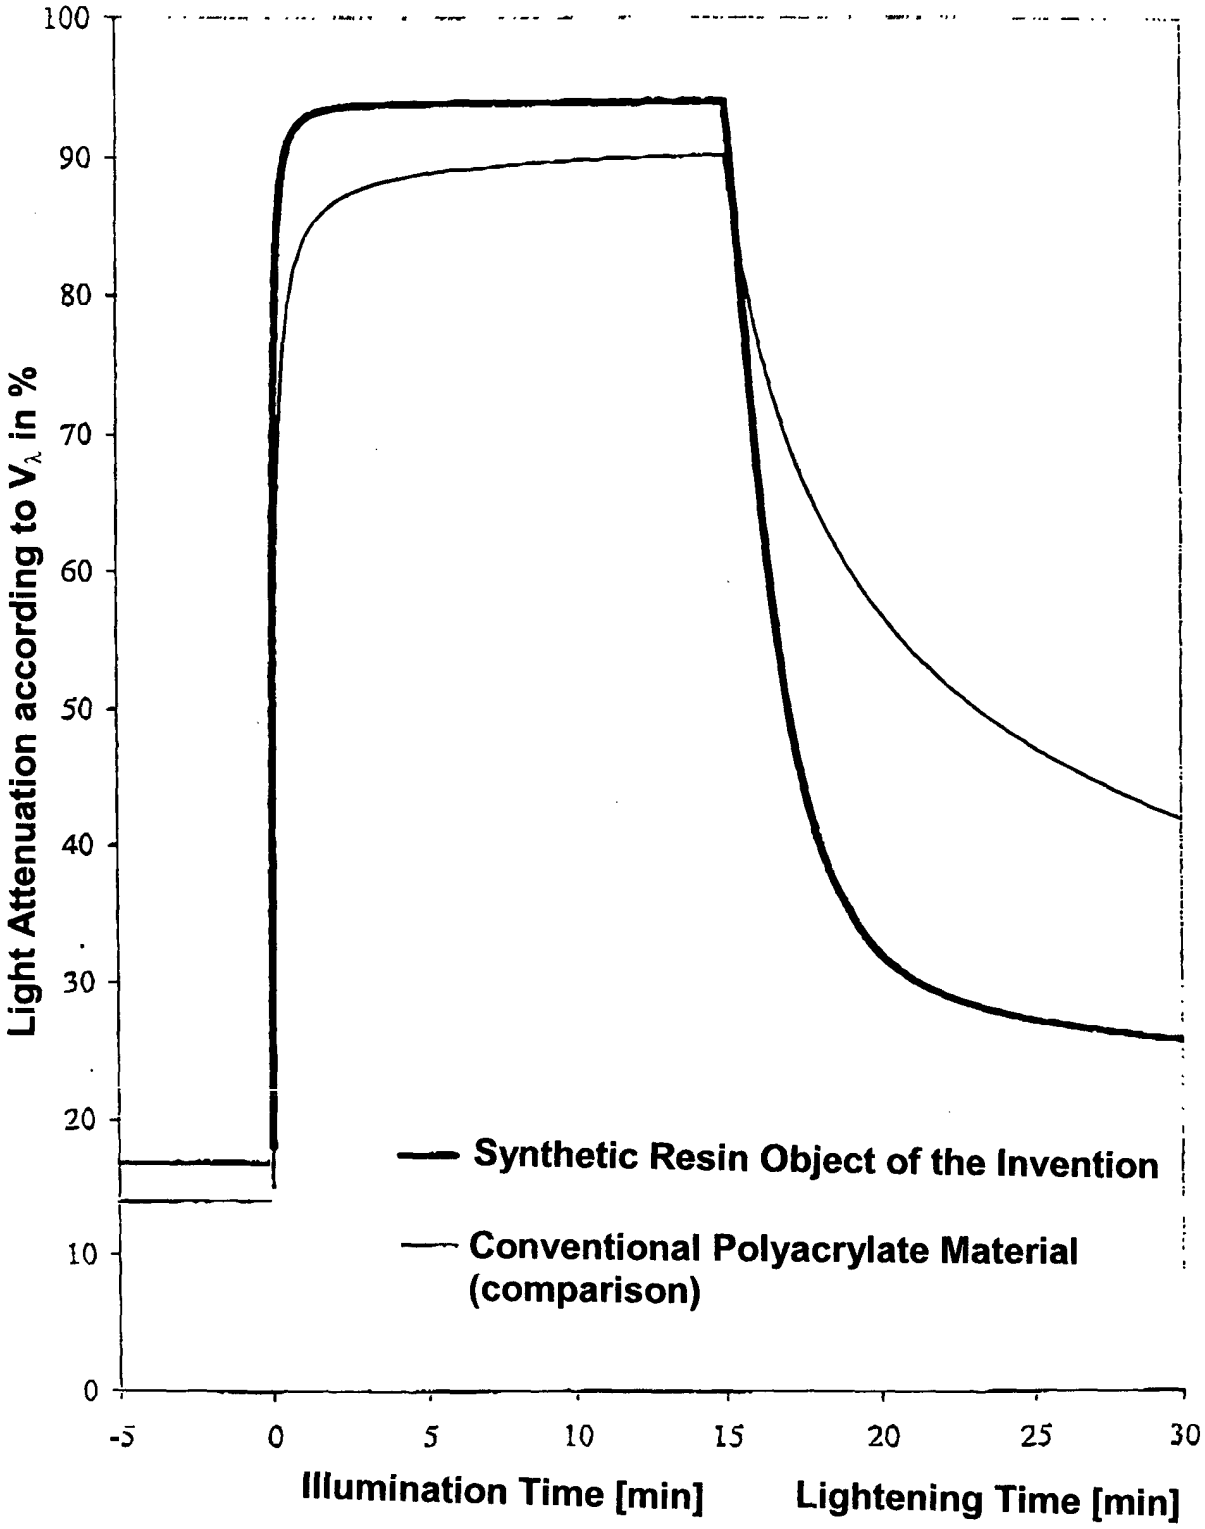
100
90
80
70
60
50
40
30
20
10
0
Light Attenuation according to V_λ in %
-5
0
5
10
15
20
25
30
Illumination Time [min]
Lightening Time [min]
Synthetic Resin Object of the Invention
Conventional Polyacrylate Material (comparison)